

ESSEL RECOVERY T-REX
PRODUCT OVERVIEW



Designed and manufactured
with a sense for detail.
You can rely on it.

USAGE


Special purpose superstructure with
the possibility of mounting on various
types of chassis, used for recovery of
crashed or broken vehicles of heavy
weight. No matter what happens, it
won't let you down.

IMPORTANT FEATURES

25 t
Max. lifting capacity of the main
crane jib

20 t
Max. loading capacity of main
boom with underlift

80 t
Combined pulling force of 5
Sepson winches

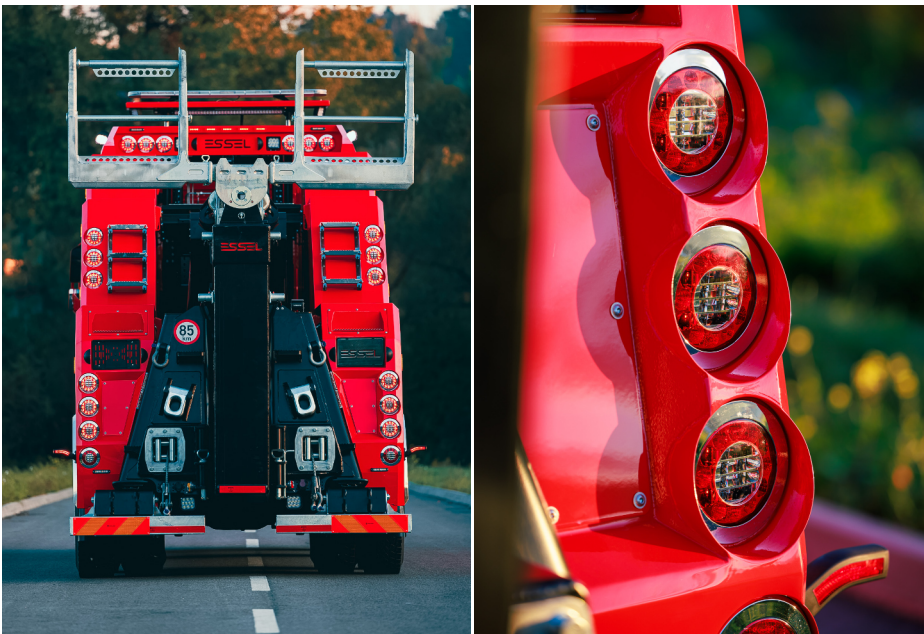

MECHANICS

CHASSIS

Axel 4
Wheel base 6m
Min. front axle capacity 9t
Equipped with power take off (PTO) engine / gear

BACK SUPPORT LEGS

Back legs in A shape
Back angle 15°, side angle 15°
Max. extension 800 mm
Made of high tensile steel in rectangular sections
Independently and hydraulically operated
Toothed spades for maximum grip

CRANE BOOM

Max. lifting capacity of main crane jib- retracted 25 t,
extended 10 t
Dimension of extended main crane jib- length 5,2 m,
height approx. 7,8 m
Max. lifting angle 40°

BODY PANELS

Made of stainless steel thickness 3 mm
Central lock system, heating
Inner painting
Hanging brackets
Rubber mats thickness 23 mm
Anti-spray mudflaps (beside G chassis)
Lights turn on automatic by PTO on
Compartments for hydraulic distributor
Compartments with lockable doors with key, with
rubber strip sealing
Inside hinges made of stainless steel thickness 5mm
Adjustable stopper for angle of open doors
Easy access to fuel tank and Ad Blue

SYSTEMS

HYDRAULIC SYSTEM

3 independent hydraulic circuits
Oil tank 120 l
Hydraulic pump with connection to PTO
Working pressure in hydraulic system 20-25 MPa
Oil flow 50-80 l/min
Proportional distributor 9 sections
Manual central greasing
Hydraulic oil cooler
Air drums

SUBFRAME

Made of high tensile steel
Sandblasted, prime and top coated for maximum
resistance against corrosion

FRONT SUPPORT LEGS

Made of high-strength steel
Front legs in A shape
Weight 1 350 kg
Toothed spades for maximum grip
Smooth foldable ends

WINCHES

Sepson Sepdurance H240 2pcs
Max. pulling capacity 24t
Inner layer 24t, outer layer 15,5t
rope length 60m, rope diameter 24mm
Sepson H125S 2 pcs
Max. pulling capacity 12t
Sepson 8t on the FSL-36

LIFTING BOOM WITH UNDERLIFT

Made of high tensile steel
Fitted with extendable hydraulically operated underlift
Underlift supplied with tilting arm with angle +-12°
Underlift with 2 telescopic extensions 2x750 mm
Manual both-sided aretation of telescopic extensions
in different positions
Max. loading capacity of main boom with underlift-
retracted on pin 20 t, extended 8 t

ELECTRIC SYSTEM

Tailor made electrical box- ESSELTRONIC
Remote control
Working lights on winch, on flyer, by support legs
Orange lights on sides of body panels
Flashing lights in front and on the flyer
Light bar on the flyer and on cabin
Combined auto lights on the flyer
Control of lights from cabin and from distributor
Radio control with 8 proportional channels
Camera on flyer and on underlift
Telescopic light bar