



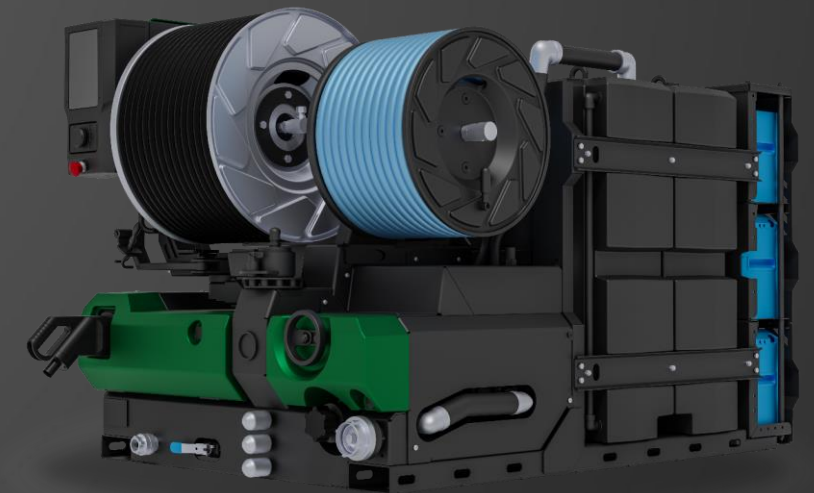

E-JETPACK DUAL

ELECTRICAL SEWER JETTING SKID UNIT

TECHNICAL SPECIFICATIONS

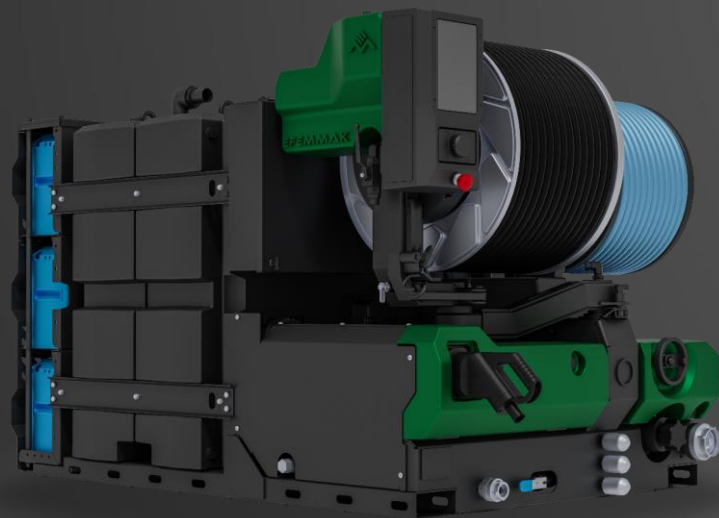

POWER

- | Battery; high performance 34,8 KWh Li-ion battery
- | Electric motor; powerful and efficient self cooling

SUPERSTRUCTURE DESIGN

- | PP water tank 2 x 300 liters
- | Electronic level indicators on E-Box display
- | Tank filling: 1 ½" hydrant connection & ¾" 50 meters hose reel

HIGH PRESSURE SYSTEM

- | Speck pulley driven pump
- | P45/60-250 60 lpm @ 200 bar / P45/75-180 75 lpm @ 160 bar
- | Low water warning
- | Manual pressure regulator

JETTING HOSE REEL SYSTEM

- | Stainless steel made
- | Electrically driven twin pivot rotating center
- | Speed regulation
- | 5/8 " 80 meter s / 1/2 " 100 meters pressure hose

ELECTRICAL SYSTEM

- | E-box controls – 7"

ACCESSORIES

- | Intersewer Arrow, Standard and Power Pull ½" nozzles
- | Washing gun

PAINT

- | External painted superstructure on requested RAL code and sticker applications

WARRANTY

- | 1-one year warranty

OPTIONS

- | Autec LK NEO 6 wireless control
- | Warranty extension
- | 300 liters tank
- | Fast charge
- | Hose counter
- | Battery; 17.4 KWh Li-ion battery

WEIGHT & DIMENSION

- | 780 kg & 1677 X 1224 X 1173 mm L x W x H

A full battery allows the system to fill and empty the water tank 15 times

